


SAS-430

Portable Infrared Document Examination System

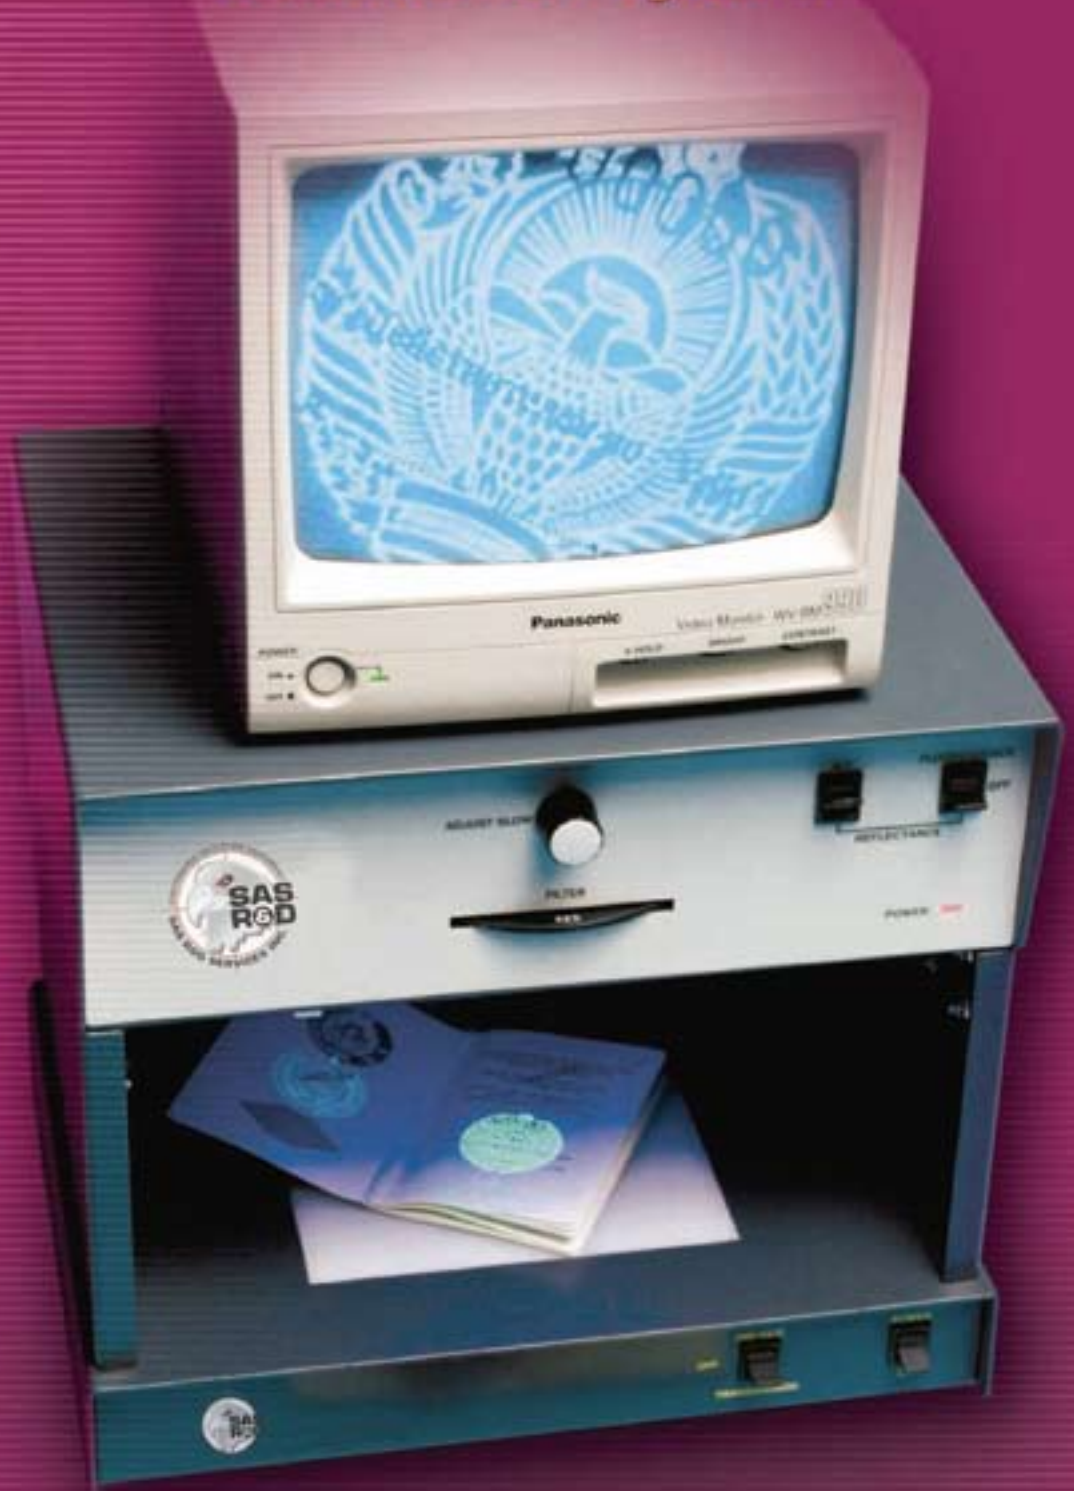

Rugged Construction

Auto Iris Camera

Simple Controls

Cost Effective

High Performance

High Resolution
Monitor

Easily Transportable

Carrying Case



SAS-430 - Portable Infrared Document Examination System

The SAS-430 has been designed to meet the demand for a very low cost portable infrared Questioned Document Examination System for the authentication of travel documents at border crossings, immigration control desks and in mobile police operations. Further uses are at scene of crime, in banks, at check-in desks or in any situation where the authenticity of documents may be in doubt.

Using the non-destructive techniques of infrared absorption and luminescence, the SAS-430 is a powerful tool for the detection of fraudulent documents of all kinds. With counterfeiting and forgery continuing to be a major criminal activity, the SAS-430 will prove invaluable to many regulatory authorities.

Available with an optional carrying case which allows complete portability and remote field operations, the SAS-430 may now be used in roadside operations when installed in vehicles.

Light Sources

Blue/Green: A 75 watt dichroic reflector lamp with heat and IR cut-off filters provides an intense cool beam for infrared luminescence excitation.

Visible/IR: Two 5 watt tungsten-halogen lamps behind diffusing windows give very even illumination for infrared reflection studies.

Ultraviolet: A new 9 watt compact long wave (365nm) black light lamp for visible luminescence and for highlighting chemical and mechanical erasures.

Transmission: A 5 watt quartz halogen lamp mounted behind a diffusing screen below the working area for the examination of transmissive security features such as watermarks, security strips and perfect resolution printing.

Oblique: A 20 watt dichroic reflector lamp mounted at the rear of the working area to produce a parallel beam for the examination of dry embossing stamps, indented writing and mechanical erasures.

Imaging System

Camera: An interline CCD (1/3") electronic iris camera, 500(h) x 582(v) pixels. CCIR standard 1 volt pp video output may be interfaced to a video printer for permanent records or linked to a PC for archiving.

Monitor: An external 230mm (diagonal) high resolution monochrome monitor. May be positioned on either side of the optical unit. Contrast and brightness controls. Weight 5.5kg, 223(w) x 225(h) x 262(d) mm.

Power: 110/220/240 volts AC.


Filters: Visible IR cut off, Red 600nm, IR1 720nm, IR2 790nm. Mounted on a manual filter wheel with filter selection engraved on wheel.

Lens: A fixed focal length (16mm), F1.4 with a front panel fine focus adjustment control. Image size 43(h) x 35(v) mm. Focus achievable up to 70 mm from the base.

Mechanical: Footprint 354 x 272 mm. Height 324 mm. Weight (ex monitor) 10kg.

SAS-430 Carrying Case

A robust case for transporting the SAS-430 System, including the monitor. The strong rigid construction, with foam padding gives complete protection during transit, even as aircraft hold baggage.

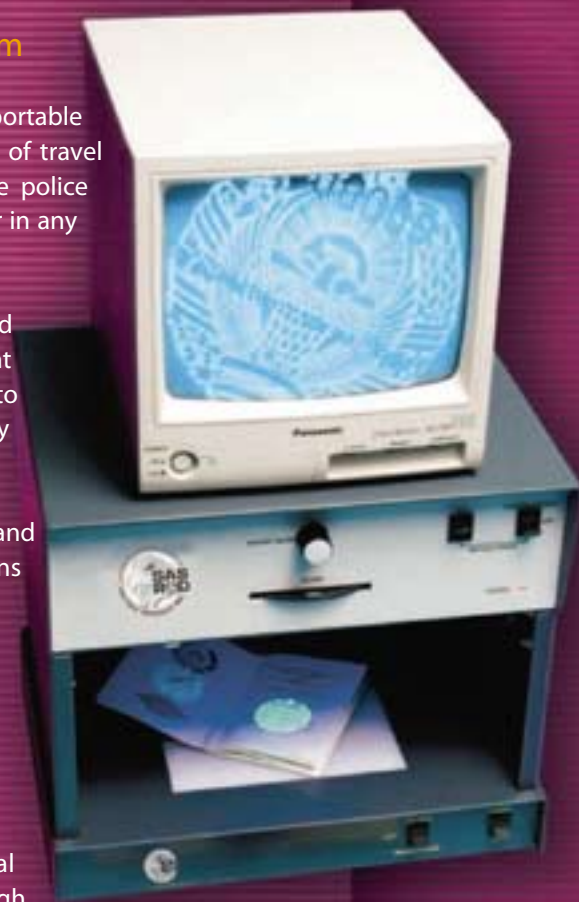

Sas R&D Services, Inc.
P.O. Box 821870, Pembroke Pines, Florida 33082-1870
Phone: (954) 432-2345 Fax: (954) 432-4141
Email: info@sasrad.com

